### **RESIN FOR FLAT HEAD PRINTERS**




**>axr7+** 

inkanto.

Excellent printing quality and sensitivity Excellent resistance to smudge and scratch Good resistance to high temperature Receptor multi-compatibility


AXR®7+ is the standard resin ribbon of the inkanto range. Its high versatility (it also prints on coated papers), its performances (sharpness, printing speed) and its ability to widen the usual application fields of resin ribbons have resulted in making AXR®7+ the worldwide reference on this family of products.

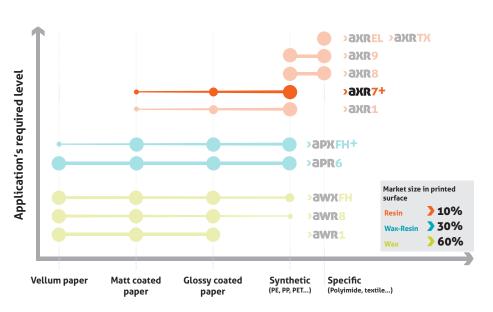

#### **Printing receptor**

papers		synthetics	
Coated	•00	PP	•••
Glossy coated	••0	PE	•••
		PET	•••


#### **Print resistance**



## Compliant with the following regulations

- **REACH / SVHC** 1907/2006/EC
- Food Contact 1935/2004/EC
- Heavy metals 2011/65/EU
- **California Proposition 65**
- Halogen Restrictions

#### **Printer settings**



#### Your ribbon identity

Colours:	$\bullet \bigcirc \bullet \bullet \bullet$	
Length (m):		
Width (mm):		
Part number:		
Your distributor:	Toplabelprinters B.V.	
Contact : inkante	o@toplabelprinters.com	


**>axr7+** 

#### **RESIN FOR FLAT HEAD PRINTERS**



#### Application fields

inkanto.

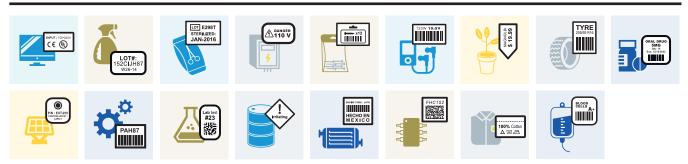


#### **Product performance**

print quality				
대를 90°Barcode	<b>95</b>	A <sub>a</sub> Small characters	<b>95</b>	✗ Logos
୮୦୦୦ ଅarcode	<b>Q</b> 100	ලකා 2D Barcode		• Blackness 'Optical Density by Reflection, measured using a densitometer.
technical resistances	;			
J Heat	180°C 356°F 300°C 572°F	☀ Light/Blue Wool	<b>•</b> • 7	▲ Solvents ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓ ↓
	<b>Q</b> 100	🖉 Rubbing	<b>95</b>	

#### **Product physico-chemical features**

product structure



PET film	Thickness: 4,5 μm			
Ink	Resin			
Melting point		80°C/176°F		
Backcoating		Silicon based		
Coefficient of Friction		Kd < 0.2		
Ribbon thickness		< 9 µm		
The ribbon is anti static build-up treated				

#### Waste management

inkanto rolls and their packaging allow an optimised waste management. For more information please contact ARMOR.


#### Storage

storage conditions

- 12 months recommended
- 20-80 % Humidity Rate, 5-35°C (40-95°F)

# inkanto.

## The inkanto benefits

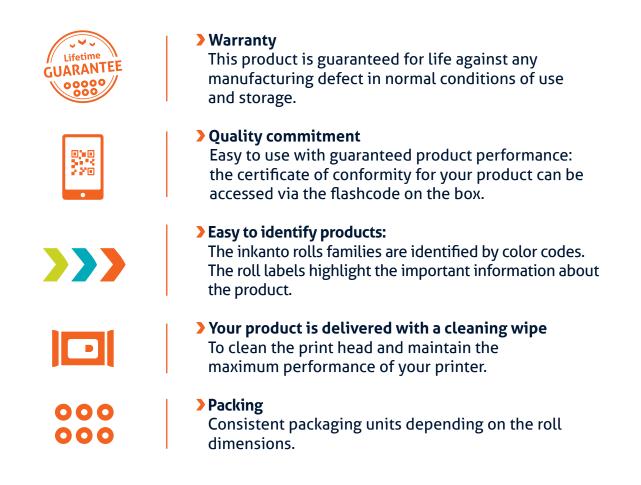

## A certified and approved production site



Quality, health & safety and environmental systems: ISO 9001 OHSAS 18001 ISO 14001 ISO 50001 (France only)



Responsible Care The charter of the International Council of Chemical Associations for improvements in health & safety and the environment.



Global Compact

UN initiative inviting companies to apply fundamental ethical and environmental values.